

LANDA®


Since 1969

Industrial Pressure Washers
...Built Right to Do the Job Right

SEHW

Self-Contained, Electric-Powered,
Diesel-Heated, Hot Water Pressure Washer

- 5.2 GPM, 3500 PSI
- Industrial-Grade, 15 HP Motor
- Belt-Drive Landa Pump with 7-Year Warranty
- Automatic Time-Delay Shutdown

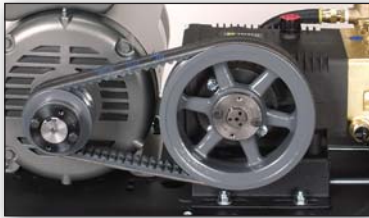

▲ Industrial-strength **Motor** and cast-iron, bushing **Pulleys** use a convenient 2-bolt pulley adjustment for easy maintenance and longer life; 2 notched "V" cogged belts, which operate cooler, connect the motor to the rugged **High-Pressure Landa Pump** with three ceramic plungers and forged brass head with seven-year warranty.

■ High-efficiency **Burner** is shielded by overhanging cover and features a **Fuel-Water Separator** for fuel pump protection.

■ Industrial-strength **15HP Electric Motor** with multiple voltage options.

■ Rust-free **Float Tank** with stainless steel inlet filter provides backflow protection and smooth water flow to pump.

■ Four quick-couple **Nozzles** are made of hardened stainless steel and mounted for ready access.

■ Motor and pump are mounted on a vibration-isolated **Power Platform** to minimize frame stress.

■ Extra-durable **Heating Coil** made of leak-free, cold-rolled, Schedule 80 steel pipe with five-year warranty.

■ Attractive brushed stainless steel upper and lower **Coil Wraps** provide a lifetime of rust-free protection.

■ Rugged **Steel Frame**, made of 1¼-inch square tubing, provides protection to key components; further protected by epoxy powder coat finish.

■ Helpful **Tri-Lingual Labels** with operating instructions in English, Spanish and French for owner and operator protection.

■ Conveniently located **Control Panel** with magnetic starter; anti-siphon detergent valve, which locks out air for precise soap metering; adjustable thermostat; hour meter; and burner monitoring light.

■ 50 ft. of double steel-wire braid **High Pressure Hose** with 24-inch guard for burst protection and rated for up to 6000 PSI.



All Models
Certified to the
UL-1776
SAFETY STANDARDS
OSHA Compliant

ISO
9001
REGISTERED



■ Many **Safety Features**, including a rupture disk, thermal pump protector and time delay shutdown to prevent unattended operation.

■ Rust-free, 10 gal. **Fuel Tank** with elevated fuel line to prevent dirt and debris from reaching burner.

■ Insulated, fatigue-free **Trigger Gun** with stainless steel, dual-lance **Variable Pressure Wand** make for easy cleaning and adjusting the pressure while washing.

www.landa.com

LANDA®

Since 1969

Industrial Pressure Washers
...Built Right to Do the Job Right

SEHW

Self-Contained, Electric-Powered,
Diesel-Heated, Hot Water Pressure Washer

- 5.2 GPM, 3500 PSI
- Industrial-Grade, 15 HP Motor
- Belt-Drive Landa Pump with 7-Year Warranty
- Automatic Time-Delay Shutdown



The SEHW is a top-of-the-line model for hot water pressure washing outdoors

WHY CHOOSE LANDA'S SEHW

The most rugged electric-powered hot water pressure washer in a skid frame is the SEHW—an acronym for Skid Electric Hot Water. It features a top-of-the-line, belt-drive, tri-plunger high-pressure Landa Pump with 7-year warranty and low RPM for extended life. Along with the other *LANDA* models that feature an easy-access, energy-efficient horizontal coil, the SEHW offers these premier benefits:

QUALITY: Packed with *LANDA* quality throughout, the SEHW is heated by diesel or fuel oil using a high-efficiency burner. Other quality features include: Heating coil made of 1/2-inch Schedule 80 steel pipe; a 1 1/4-inch steel frame; a detergent metering valve for convenience in adjusting the flow of the soap; and a power platform for the motor and pump that is mounted on vibration isolators to minimize stress on the frame and to increase the equipment life.

PORTABILITY: The SEHW, with its convenient forklift guides, is easy to maneuver as well as load or unload. A wheel kit featuring four tubed pneumatic tires further enhances the SEHW's portability.

SAFETY: Certified to the rigid UL-1776 safety standards, the SEHW also has many features that make it extremely safe, including motor thermal overload protection, rupture disk attached to the heating coil, thermal pump protector, flow-activated fuel shut-off switch, time-delay shutdown, 24-inch hose guard for burst protection, and magnetic starter. The OSHA-compliant belt guard is totally enclosed for operator safety.

SEHW Specifications

| Part No. | GPM | PSI | Motor HP | Electrical | Amps | Pump RPM | BTU / Hr | L x W x H | SHIP WT. |
|--------------|-----|------|----------|------------|------|----------|----------|-----------------|----------|
| SEHW6-35024B | 5.2 | 3500 | 15 | 230V 3ph | 44 | 1340 | 469,000 | 43" x 31" x 43" | 710 lbs. |
| SEHW6-35024C | 5.2 | 3500 | 15 | 460V 3ph | 19 | 1340 | 469,000 | 43" x 31" x 43" | 730 lbs. |

Note: We are constantly improving and updating our products. Consequently, pictures, features, and specifications in this brochure may differ slightly from current models. Flow rates and pressure ratings may vary due to variances allowed by manufacturers of our machine components. We attempt to keep our machine performance within ±5% of listed specifications.

LANDA®

Distributed by:

OPTIONS:

| Part No. | Description |
|----------|---|
| 4-03175 | Wheel Kit, Including 4 Tubed Pneumatic Tires |
| 30-478 | Automatic Start / Stop (replaces Time Delay Shutdown) |

www.landa.com